



OSIL
Environmental Instruments
and Systems

PISTON CORER


Robust Sediment Corer with Penetration Depth

The increased penetration depth of the Piston Corer has made it one of the basic tools used in the study of marine sediments. Piston core samples are usually longer, less disturbed and more complete than those from gravity corers. The main advantage of a Piston Corer over the Gravity Corer is the greater length of core obtained. The action of the piston reduces internal friction and prevents plugging. Cores of over 18m are possible in soft sediment and muds. The mechanical trigger enables the free fall distance to be adjusted via the length of cable from clamp to counterweight.

- For use in soft, cohesive sediments at up to full ocean depth.
- Stainless Steel or galvanised steel construction, depending on application and budget.
- Corer lowered to seabed, where messenger or pilot core operated release mechanism triggers final free fall sediment penetration.

FEATURES

- Up to 18m cores
- Messenger/pilot core release
- Minimal 'down' time
- Varying core lengths
- Robust and easy to use

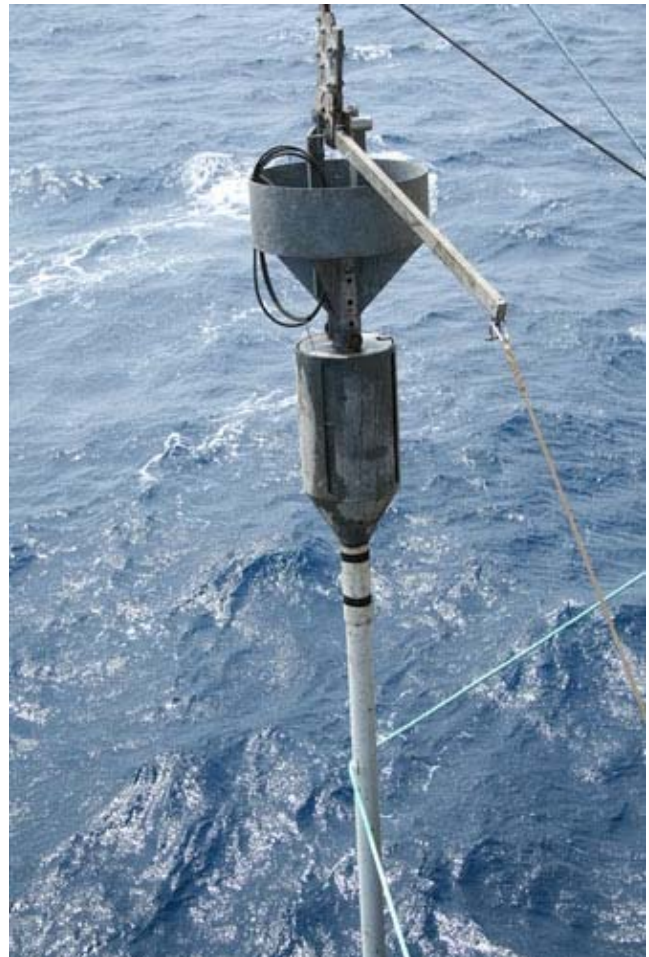

FOR FURTHER INFORMATION PLEASE CONTACT:

OSIL, Culkin House, C7/8 Endeavour Business Park, Penner Road, Havant, Hampshire PO9 1QN
T: +44 (0) 2392 488240 F: +44 (0) 2392 488241 E: osil@osil.com W: www.osil.com



OSIL
Environmental Instruments
and Systems

PISTON CORER

Robust Sediment Corer with Penetration Depth

APPLICATIONS

- Geological studies
- Marine chemistry
- Sedimentology
- Exploration
- Ocean floor processes

Technical Specifications

Maximum core length:

- 18m (6 x 3m core barrels)

Barrel diameter:

- 140 mm

Internal core diameter:

- 100 mm

Trigger core length:

- 2m (internal diameter, 72 mm)

Construction Material:


- Stainless Steel or Galvanised steel
- PVC liner

Total weight:

- 1500 kg

Depth rating:

- Full ocean depth (6000m)

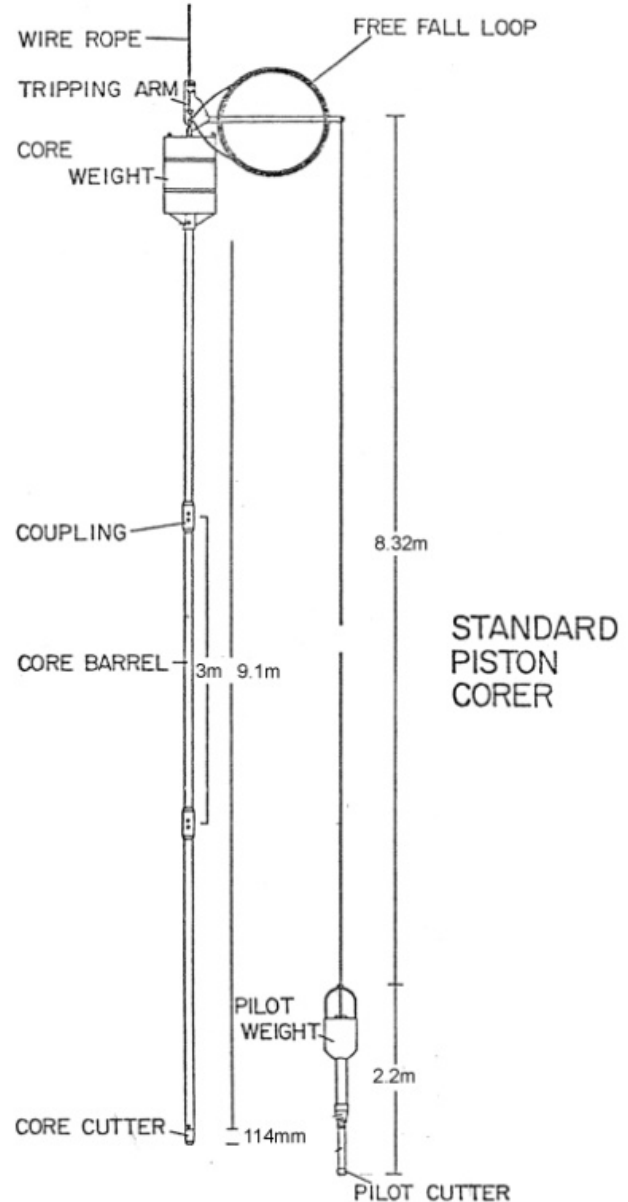

FOR FURTHER INFORMATION PLEASE CONTACT:

OSIL, Culkin House, C7/8 Endeavour Business Park, Penner Road, Havant, Hampshire PO9 1QN
T: +44 (0) 2392 488240 F: +44 (0) 2392 488241 E: osil@osil.co.uk W: www.osil.co.uk